
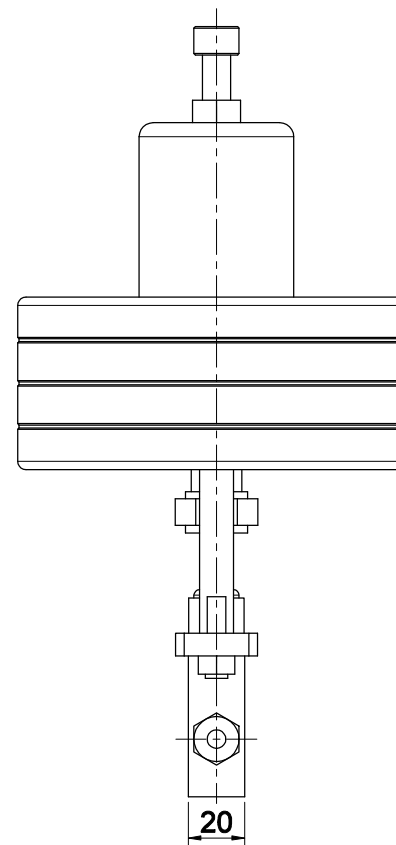
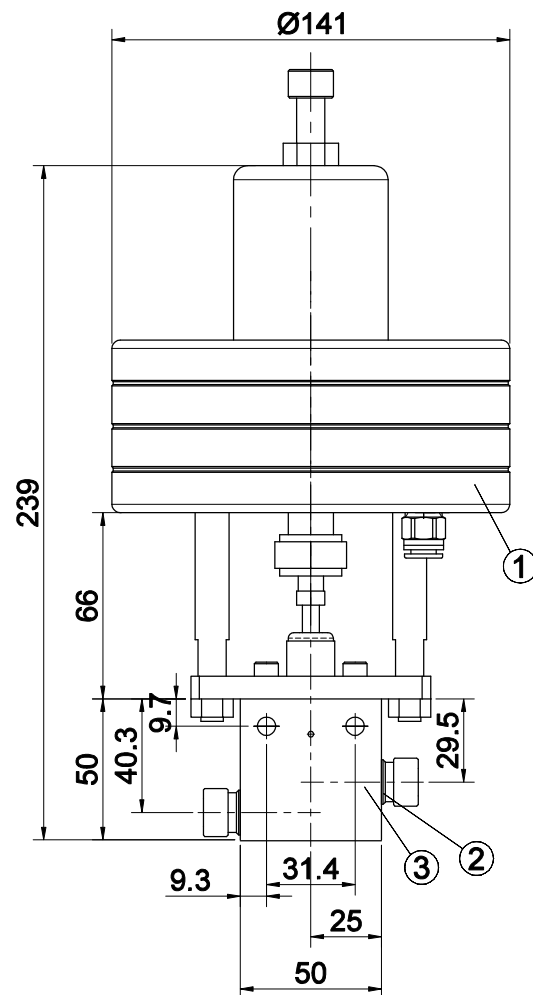




- SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port type	Orifice Size(Ø)	Material
AOV15CS06-S	10,000	H1506	Ø3.2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	15,000PSI 3/8"	FA15SS06	STS316CW	2	EA	-
2	GLAND	15,000PSI 3/8"	FA15GS06	STS316CW	2	EA	-
1	ASSM	15,000PSI 3/8"	AOV15CS06-S	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION					
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1			 		TITLE		
NOMINAL DIM.(MM)			CLASS OF FINISH		NORMAL CLOSE A.O.V		
OVER	UNDER	TOL.			15,000PSIG 3/8" STRAGHT		
0.5	6	±0.1	✓ = 20S, ~		AOV15CS06-S		
6	30	±0.2	✓ = 12S, ~				
30	120	±0.3	✓ = 12S, ~				
120	315	±0.5	✓ = 12S, ~				
315	1000	±0.8	✓ = 12S, ~				
1000	2000	±1.2	✓ = 12S, ~				
OVER 2000		±1.5	✓ = 12S, ~				
					APPD BY		
					CHD BY		
					DED BY		
					DRN BY		
					WORK NO.		
					HI-KYJ-241204-01		
					REV. NO.		
					SCALE		
					1:1		
					DRN DATE		
					12, 2024		
					DWG NO.		
					AOV15CS06-S		
							