
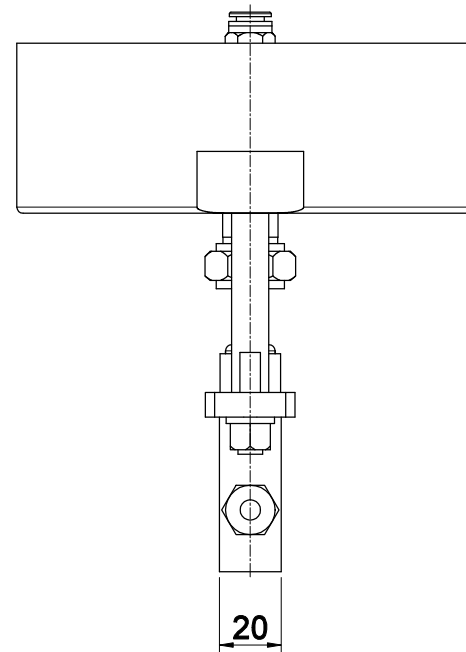
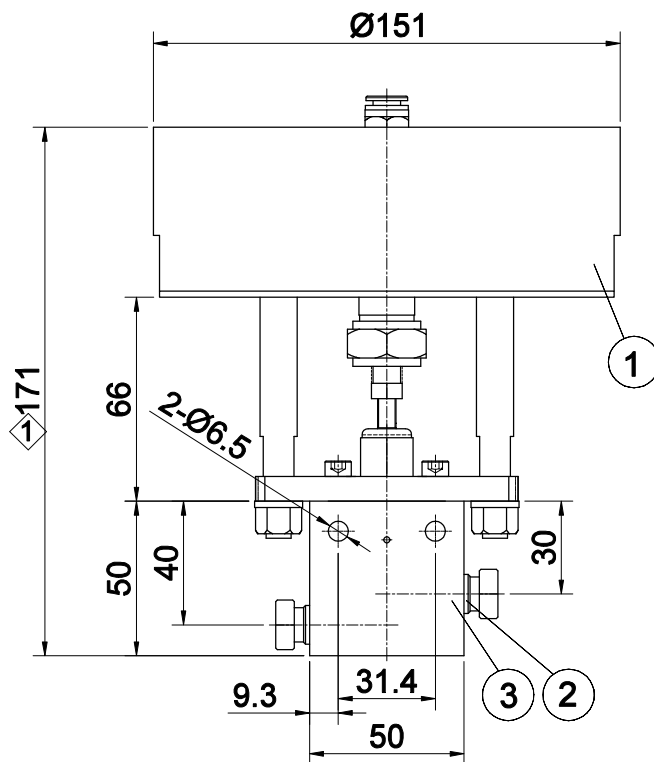




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV15OS04-S	15,000	H1504	3.2	STS316CW	20

- Note

1. All dimensions for reference only and subject to change.

0	FOR APPROVAL	/			
REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY	DESIGN SECTION

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLOR	15,000PSI 1/4"	FA15SS04	STS316CW	2	EA	
2	GLAND	15,000PSI 1/4"	FA15GS04	STS316CW	2	EA	
1	A.O.V	15,000PSI 1/4"	AOV15OS04-S	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION			FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°			UNIT: MM		PROJECT		
General tolerance is given in KS B ISO 2768-1			Normal Open Air Operating Valve Straight Type				
NOMINAL DIM.(MM)			TITLE				
			15,000PSIG 1/4"				
CLASS OF FINISH							
OVER	UNDER	TOL.					
0.5	6	±0.1					
6	30	±0.2					
30	120	±0.3					
120	315	±0.5					
315	1000	±0.8					
1000	2000	±1.2					
OVER 2000		±1.5					

UNIT: MM		PROJECT	
		Normal Open Air Operating Valve Straight Type	
CLASS OF FINISH		TITLE	
		15,000PSIG 1/4"	
✓ = 20S, ~		APPD BY	
✓ = 12S, ~		CHD BY	
✓ = 12S, ~		DED BY	
✓ = 12S, ~		DRN BY	
✓ = 12S, ~		WORK NO.	
✓ = 12S, ~		HI-KYB-220715-01	
✓ = 12S, ~		SCALE	
✓ = 12S, ~		1:1	
✓ = 12S, ~		DRN DATE	
✓ = 12S, ~		05, 2023	
✓ = 12S, ~		DWG NO.	
✓ = 12S, ~		AOV15OS04-S	
✓ = 12S, ~		REV. NO.	
✓ = 12S, ~		1	

