
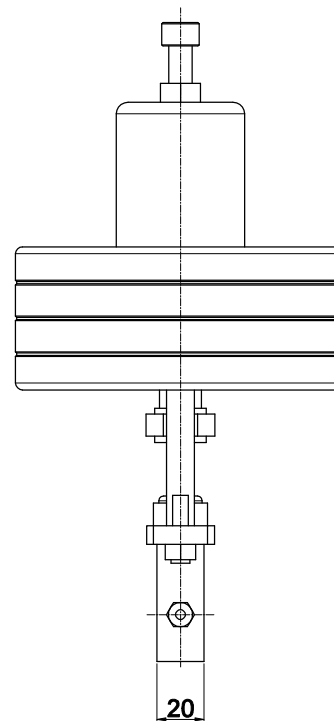
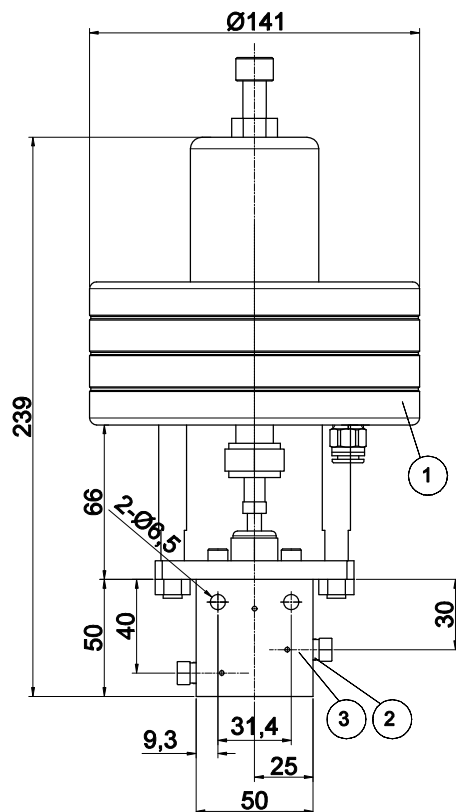




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV20CS04-S	20,000	H2004	Ø3.2	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com							
3	COLLAR	20,000PSI 1/4"	FA20RS04	STS316CW	2	EA	-		
2	GLAND	20,000PSI 1/4"	FA20GS04	STS316CW	2	EA	-		
1	ASS'M	20,000PSI 1/4"	AOV20CS04-S	-	1	EA	-		
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK		
PART CODE		DESCRIPTION		FOR ONE SET					
MATERIAL LIST FOR ONE SET									
No Indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT					
General tolerance is given in KS B ISO 2768-1				NORMAL CLOSE A.O.V					
NOMINAL DIM.(MM)		CLASS OF FINISH		TITLE					
OVER	UNDER	TOL.	✓ = 0.2, 200S, ~	20,000PSIG 1/4" STRAGHT					
0.5	6	±0.1	✓ = 0.2, 50S, ▽	AOV20CS04-S					
6	30	±0.2	✓ = 0.2, 12.5S, ▽						
30	120	±0.3	✓ = 0.2, 3.2S, ▽						
120	315	±0.5	✓ = 0.2, 0.8S, ▽						
315	1000	±0.8							
1000	2000	±1.2							
OVER 2000		±1.5							
				APPD BY	CHD BY	DET BY	DRN BY	WORK NO.	REV. NO.
				K.Y.J	K.Y.J	K.Y.J	K.Y.J	H-KY-J-20220809-03	
				SCALE	1:1		DRN DATE	DWG NO.	
						08, 2022	AOV20CS04-S		
									

HIFLUX®