
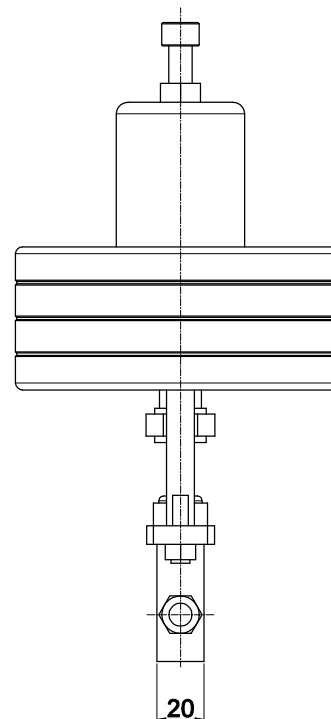
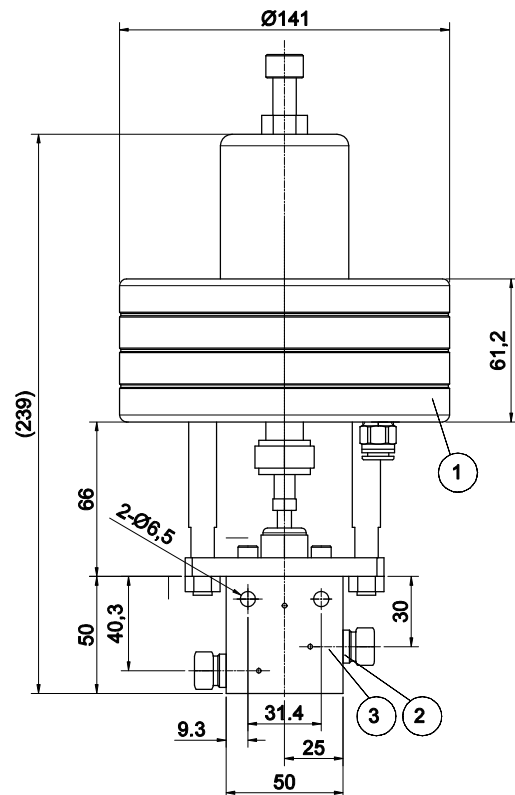




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV20CS06-S	20,000	H2006	Ø5.5	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 3/8"	FA20RS06	STS316CW	2	EA	-
2	GLAND	20,000PSI 3/8"	FA20GS06	STS316CW	2	EA	-
1	ASS'Y	20,000PSI 3/8"	AOV20CS06-S	-	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No Indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				NORMAL CLOSE A.O.V			
NORMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	✓ = √, 200S, ~	20,000PSIG 3/8" STRAGHT			
0.5	6	±0.1	✓ = √, 50S, ▽	AOV20CS06-S			
6	30	±0.2	✓ = √, 12.5S, ▽	APPD BY			
30	120	±0.3	✓ = √, 3.2S, ▽	CHD BY	DET BY	DRN BY	WORK NO.
120	315	±0.5	✓ = √, 0.8S, ▽	KY.J	KY.J	KY.J	HI-KY-J-20230112-01
315	1000	±0.8		SCALE	DRN DATE	DWG NO.	REV. NO.
1000	2000	±1.2		1:1	01, 2023	AOV20CS06-S	0
OVER 2000		±1.5		HIFLUX®			