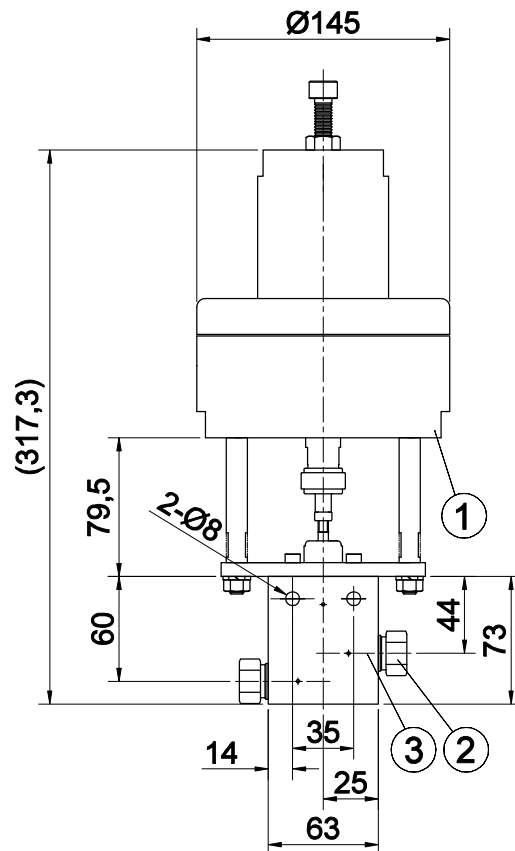



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
AOV20CS09-S	20,000	H2009	Ø7.9	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 9/16"	FA20RS09	STS316CW	2	EA	-
2	GLAND	20,000PSI 9/16"	FA20GS09	STS316CW	2	EA	-
1	ASS'Y	20,000PSI 9/16"	AOV20CS09-S	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
	PART CODE				FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		 		NORMAL CLOSE A.O.V			
NORMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	✓ = ∅, 200S, ~	20,000PSIG 9/16" STRAGHT			
0.5	6	±0.1	✓ = ∅, 50S, ▽	AOV20CS09-S			
6	30	±0.2	✓ = ∅, 12.5S, ▽				
30	120	±0.3	✓ = ∅, 3.2S, ▽				
120	315	±0.5	✓ = ∅, 0.8S, ▽				
315	1000	±0.8					
1000	2000	±1.2					
OVER 2000		±1.5					
				APPD BY CHD BY DET BY DRN BY WORK NO. REV. NO.			
				KY.J KY.J KY.J KY.J H-KYJ-200120-05			
				SCALE 1:1 DRN DATE 06, 2022 DWG NO. AOV20CS09-S			
							