
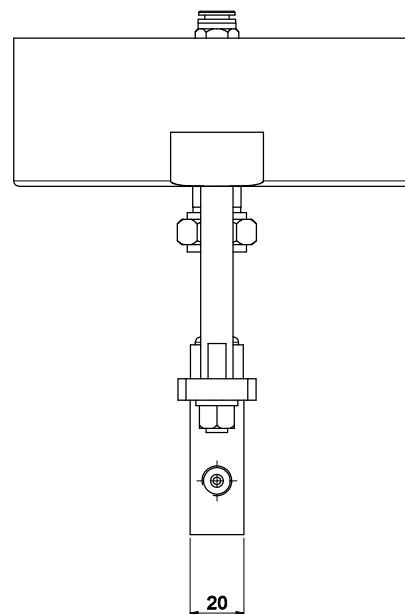
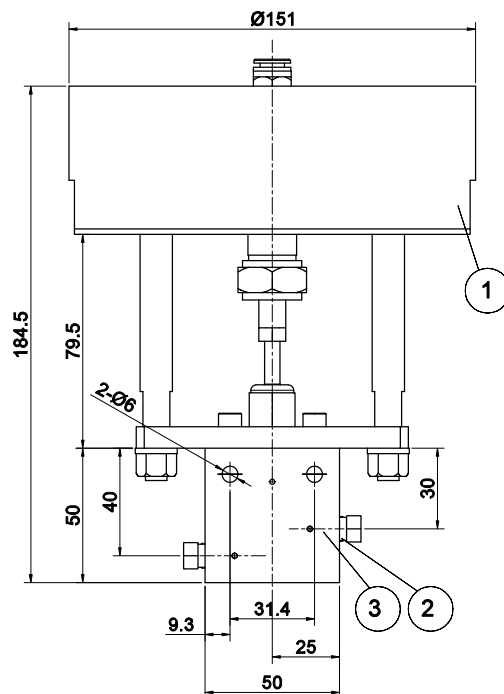




- SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV200S04-S	20,000	H2004	3.2	STS316CW	20

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		

Website		Main site : http://www.hiflux.com Shopping mail : http://www.hifluxmall.com									
3	COLLOR	20,000PSI 1/4"	FA20RS04	STS316CW	2	EA					
2	GLAND	20,000PSI 1/4"	FA20GS04	STS316CW	2	EA					
1	A.O.V	20,000PSI 1/4"	AOV200S04-S	STS316CW	1	EA	-				
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK				
	PART CODE				FOR ONE SET						
MATERIAL LIST FOR ONE SET											
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT							
General tolerance is given in KS B ISO 2768-1		 		Normal Open Air Operating Valve Angle Type							
NOMINAL DIM.(MM)				TITLE							
				20,000PSIG 1/4"							
				20,000PSIG 1/4"							
OVER	UNDER	TOL	CLASS OF FINISH								
0.5	6	±0.1	✓ = 10, 200S, ~								
6	30	±0.2	✓ = 12, 50S, ▽								
30	120	±0.3	✓ = 14, 12.5S, ▽								
120	315	±0.5	✓ = 16, 3.2S, ▽								
315	1000	±0.8	✓ = 18, 0.8S, ▽								
1000	2000	±1.2									
OVER 2000		±1.5									
DESIGN SECTION		APPROVED BY									

APPD BY	CHD BY K.T.J	DED BY K.T.J	DRN BY K.T.J	WORK NO. H4-KY-221103-09	REV. NO.
SCALE	1:1		DRN DATE 11, 2022	DWG NO. ACV200S04-S	
HIFLUX®					

HIFLUX®