
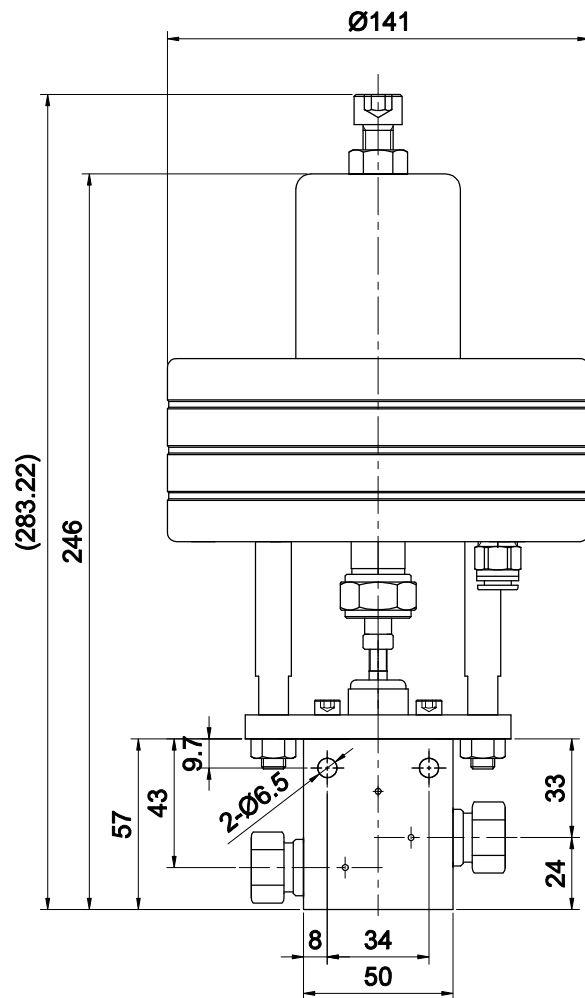




- Note

1. All dimensions for reference only and subject to change.

0	FOR APPROVAL	/			
REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY	DESIGN SECTION

- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV60CS06-S	60,000	H6006	2	STS316CW	25

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLOR	60,000Psi 3/8"	FA60RS06	STS316CW	2	EA	
2	GLAND	60,000Psi 3/8"	FA60GS06	STS316CW	2	EA	
1	A.O.V	60,000Psi 3/8"	AOV60CS06-S	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
	PART CODE				FOR ONE SET		
MATERIAL LIST FOR ONE SET							
No Indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				Normal Close Air Operating Valve Straight Type			
NOMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	√ = √, 200S, ~	60,000PSIG 3/8"			
0.5	6	±0.1	√ = √, 50S, ▽				
6	30	±0.2	√ = √, 12.5S, ▽				
30	120	±0.3	√ = √, 3.2S, ▽				
120	315	±0.5	√ = √, 0.8S, ▽				
315	1000	±0.8					
1000	2000	±1.2					
OVER 2000		±1.5					
				APPROD BY		CHD BY	DET BY
				KY.J		KY.J	KY.J
				SCALE		DRN DATE	WORK NO.
				1:1		06, 2024	H-KY-240005-02
						DWG NO.	REV. NO.
						AOV60CS06-S	0
							