
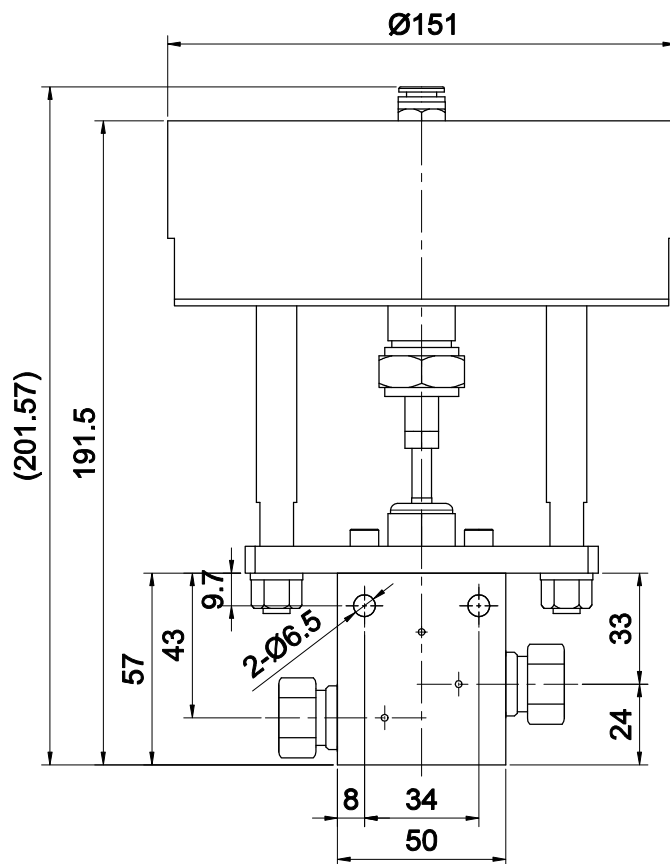




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV60OS06-S	60,000	H6006	2	STS316CW	25

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLOR	60,000psi 3/8"	FA60RS06	STS316CW	2	EA	
2	GLAND	60,000psi 3/8"	FA60GS06	STS316CW	2	EA	
1	A.O.V	60,000psi 3/8"	AOV60OS06-S	STS316CW	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				Normal Open Air Operating Valve Straight Type			
NOMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	✓ = 0.1, 200S, ~	60,000PSIG 3/8"			
0.5	6	±0.1	W = 12.5, 50S, ▽				
6	30	±0.2	X = 3.2, 12.5S, ▽▽				
30	120	±0.3	Y = 0.8, 3.2S, ▽▽▽				
120	315	±0.5	Z = 0.8, 0.8S, ▽▽▽▽				
315	1000	±0.8					
1000	2000	±1.2					
	OVER 2000	±1.5					
				APPD BY			
				CHD BY	DET BY	DRN BY	WORK NO.
				KY.J	KY.J	KY.J	H-KY-J-240005-01
				SCALE		DRN DATE	DWG NO.
				1:1		06, 2024	AOV60OS06-S
				REV. NO.			
				0			
HIFLUX®							

- Note

1. All dimensions for reference only and subject to change.

0	FOR APPROVAL	/			
REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY	
DESIGN SECTION					